


# Anna

VARIO

## Recessed LED Panel

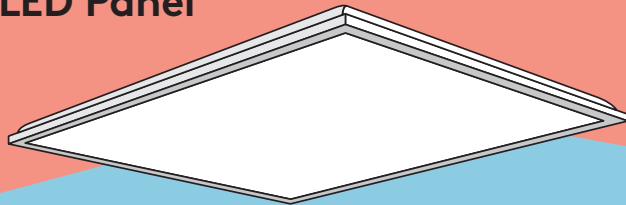

### Ideal for:



Offices and  
meeting rooms



Schools and  
universities



Foyers and  
waiting rooms

Sophisticated and compact, Anna creates a pleasant atmosphere in communication areas



Switchable  
light colour  
4000 K  
5000 K  
5700 K



4800 lm  
3500 lm  
800 lm  
up to  
120 lm/W



1200 × 600 mm  
1200 × 300 mm  
600 × 600 mm  
600 × 300 mm



50 000  
hours lifetime







IP44  
(from below)

- Switchable light colour: choose between 4000K Neutral white, 5000K Cool white or 5700K Daylight to suit the application
- Back-lit LED panel with lightweight design and low installation depth
- High uniformity microprismatic diffuser, UGR<19: gentle, soft and glare-free lighting
- IP44 from below for hassle-free cleaning
- Replaces conventional luminaires with 2×18 W T8, 4×18 W T8, 4×36 W T8 and 2×36 W T8 and offers more than 40% energy saving
- Ideal solution for any refurbishment job
- Supplied with remote driver, pre-wired with 2 pin FLEX&PLUG (1.2m length) for tool-free installation
- Suitable for recessed mounting in T-bar ceiling grids

	L	W	H1	H2
ANNA 600 × 300	596	296	34	60
ANNA 600 × 600	596	596	34	60
ANNA 1200 × 300	1196	296	34	60
ANNA 1200 × 600	1196	596	34	60

Dimensions (mm)

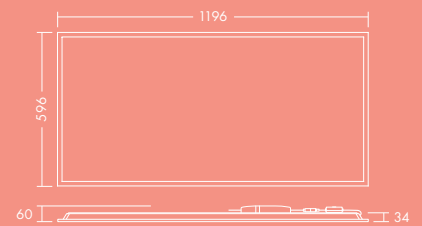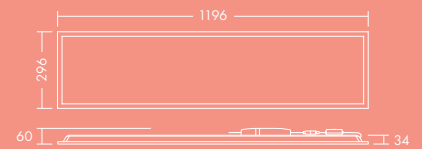

### Specification

Electrical class	II
Ambient operating temperature	-20 to +40 °C
IP rating	IP44 (from below), IP20 (from above)
IK rating	IK03

### Installation / Mounting

Mounting	Lay-in installation in T-bar ceiling grids Suitable for surface mounting (available as accessories)
----------	--

### Material / Finish

Frame	Aluminium, white finish (RAL 9003)
Diffuser	TpB rated, microprismatic diffuser
Light guide panel	High uniformity PS diffuser
Backplate	Steel sheet, white finish (RAL 9003)

### Light source information

Lumen	4800 lm (40 W), 4000 K, 120 lm/W 3500 lm (35 W), 4000 K, 100 lm/W 3500 lm (35 W), 4000 K, 100 lm/W 1800 lm (18 W), 4000 K, 100 lm/W
Colour temperature	Switchable colour temperature: 4000 K, 5000 K and 5700 K
CRI	CRI 80
Lifetime	50 000 hours rated life (@L80, Ta 25° C)
MacAdam (Initial)	4

### Ordering guide

Description	SAP Code
ANNA VARIO 1200X600 4800 840/50/57 FP	96652626
ANNA VARIO 1200X300 3500 840/50/57 FP	96652627
ANNA VARIO 600X600 3500 840/50/57 FP	96652628
ANNA VARIO 600X300 1800 840/50/57 FP	96652629