


# Chloe Vario

## Performance LED Downlight

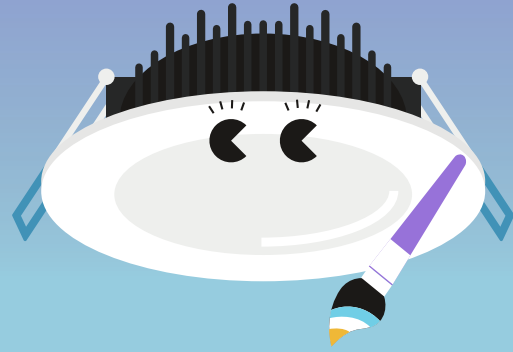

### Versatile and durable, Chloe Vario blends in a wide range of applications

- A slim ceiling recessed LED downlight with switchable light colour: choose between warm white (3000 K), cool white (4200 K) and daylight (5700 K) to suit application use
- Beam angle 95°
- High colour rendering and uniform light surface with no shadowing
- External electronic: dimmable LED driver suitable with trailing edge and universal dimmers\*
- Thermally optimised aluminium body
- Fitted with flex and plug
- Interchangeable trim rings available separately

\*see installation instructions for compatible dimmer list



Switchable light colour



800–945 lumens, up to 94.5 lm/W



IP44 (from below) IP20 (from above)



30 000 hours lifetime



Dimmable



Replacement for 1×18 W CFL

### Ideal for ...



Corridors




Toilets & Bathrooms




Residential




Hotels

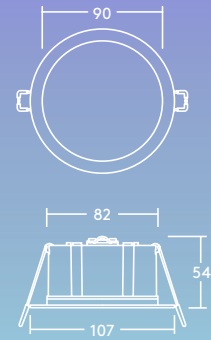

## Light distribution



85 lm/W

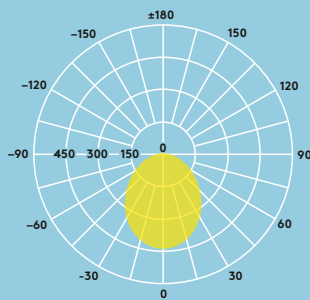

### Chloe Vario 850 lm

cd/klm ULOR: 0 %  
DLOR: 100 %  
LOR: 100 %

## Light source information

- 50 000 hours rated life (@L70, Ta 25 °C)
- 3000K: 800lm (10W), 80lm/W
- 4200K: 945lm (10W), 94.5lm/W
- 5700K: 890lm (10W), 89lm/W
- CRI 80

## Installation/Mounting

Chloe Vario LED can be installed into a wide range of ceiling types of 2-20mm thickness

## Material/Finish

- Body: Aluminium
- Trim: Metal, white

## Ordering guide

Description	SAP Code
CHLOE VAR LED 90 800 830/42/57 DIM WH FP	96631233
CHLOE VAR TRIM WH FLAT	96631234
CHLOE VAR TRIM SR REBATED	96631235
CHLOE VAR TRIM SR FLAT	96631236
CHLOE VAR TRIM BK REBATED	96631237
CHLOE VAR TRIM BK FLAT	96631238

## Specification

- Class II electrical
- IP44 (from below), IP20 (from above)
- IK02
- Insulation Coverable Luminaire and Driver (IC-4/IC-F)



96631238



96631234



96631236



96631237



included with the product



96631235

