


Julie

FLEX

IP65 LED Luminaire




Ideal for: Multi story car parks, workshops, underpasses and storage facilities

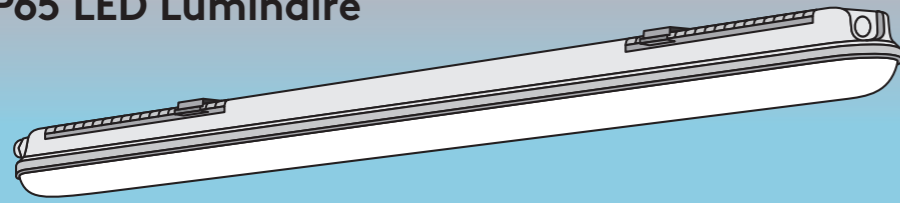

Clipless design for a more robust performance and easy installation.




- **FLEX Feature (Lumen switch):** The flexibility to decide on your lumen package on site
- Click-fit clipless diffuser for easy installation
- Energy efficient up to 127 lm/W. Save up to 60% energy compared to a T8 fluorescent
- Perfect for retrofit projects – flexible bracket sliders mean no re-drilling is required in 1:1 replacements
- Quick access with flat head screwdriver for easy maintenance
- Available in standard, quick connect, through-wire and presence sensor with corridor functionality versions
- BESA compatible
- JUST – adapt on-site to an emergency version using the Just Emergency Linear PLUG&PLAY kit (self test with manual option)

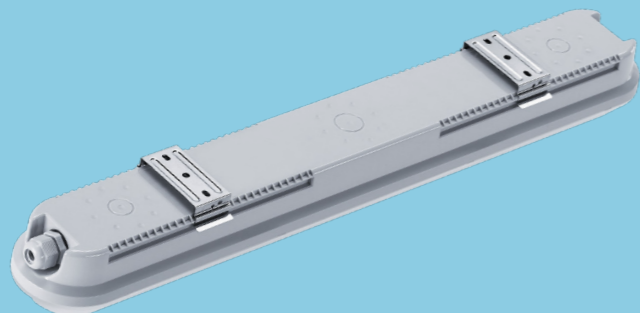

	Slider	L	W	H
JULIE 600 LED IP65	170-500	635	94	76
JULIE 1200 LED IP65	570-1100	1235	94	76
JULIE 1500 LED IP65	670-1400	1535	94	76

Dimension (mm)

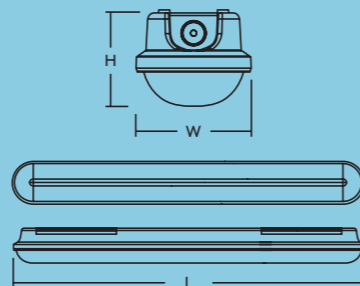

Specification

Electrical class	I
Ambient operating temperature	-20 to +40 °C (E3: 0 to +25 °C)
Driver	ENEC certified

Material / Finish

Canopy	UV stabilised grey polycarbonate
Diffuser	UV stabilised opal polycarbonate
Bracket	Stainless steel

Light source information

Colour temperature	4000 K
FLEX (Lumen switch)	600mm 1000lm(8W), 1500lm(12W), 2200lm(18W) 1200mm 2200lm(18W), 3200lm(25W), 4200lm(34W) 1500mm 4200lm(33W), 5200lm(41W), 6300lm(51W) 1500mm 4200lm(33W), 6300lm(50W), 8600lm(72W)
Efficiency	>127lm/W
Lifetime	50 000 hours (@L80, Ta 25 °C)
MacAdam (Initial)	4

Controllability (default)


Sensitivity	10%, 50%, 75%, 100%
Time	5s, 30s, 60s, 5 min, 10 min, 20 min, 30 min
Lux	2 lux, 10 lux, 50 lux, disable
Stand-by time	0 sec, 10 sec, 1 min, 10 min, 30 min, 60 min, endless
Dimming level	10%, 20%, 30%, 50%

Presence sensor with corridor function

Julie's microwave sensor option with corridor function will ensure that you never walk in the dark. The settings are fully adjustable, with the additional benefit of a daylight sensor. Option to connect several luminaires together onto one sensor, for simultaneous functionality.

Sensor range

at 100% sensitivity

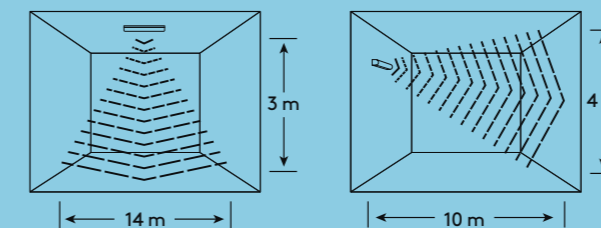

Ordering guide

Description	Cat Number
JULIE FLEX 1200 4200 840	JU4200F4F
JULIE FLEX 1200 4200 840 QC	JU4200F4FQ
JULIE FLEX 1200 4200 840 COR MWS	JU4200FCM4F
JULIE FLEX 1200 4200 840 DALI	JU4200FX4F
JULIE FLEX 1200 4200 840 TW	JU4200F4FTW
JULIE FLEX 1500 6300 840	JU6300F5F
JULIE FLEX 1500 6300 840 QC	JU6300F5FQ
JULIE FLEX 1500 6300 840 COR MWS	JU6300FCM5F
JULIE FLEX 1500 6300 840 DALI	JU6300FX5F
JULIE FLEX 1500 6300 840 TW	JU6300F5FTW
JULIE FLEX 1500 8600 840	JU8600F5F
JULIE FLEX 1500 8600 840 QC	JU8600F5FQ
JULIE FLEX 1500 8600 840 TW	JU8600F5FTW
JULIE FLEX 600 2200 840	JU2200F2F
JULIE FLEX 600 2200 840 DALI	JU2200FX2F
JUST E3 LINEAR P&P KIT SelfTest LiFePo4*	ECOLINE3TLIFEKIT

MWS: microwave presence sensor
COR: corridor function
TW: through-wired
QC: with quick connector

* not compatible with 600mm or DALI version