


Lara

VARIO FLEX

Circular IP65 LED Bulkhead



Ideal for: Circulation corridors, stairwells, underpasses and public entrance areas

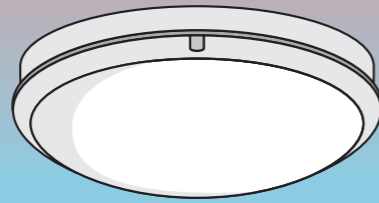


With a range of accessories, Lara is the ultimate choice for a range of indoor and outdoor settings.



- VARIO Feature (Colour Temperature Switch): The ability to choose your colour temperature on site with the flick of a switch
- FLEX Feature (Lumen Output Switch): The flexibility to decide on your lumen package on site with the flick of a switch
- Opal diffuser for homogeneous light effect and visual comfort
- Sealed to IP65 for protected exterior applications
- Robust construction up to IK10 impact resistance
- White Body with optional trim or eyelid (both in black or white)
- Optional with 3h emergency kit and sensor option (self test with manual option)
- Compatible with BESA Box
- Easy to program sensor version via dip switches directly on the sensor. To suit a variety of indoor and outdoor applications



	Ø	H
LARA LED 250	250	75
LARA LED 300	300	75
Dimensions (mm)		



Specification

Electrical class	II
Ambient operating temperature	-20 to +40 °C (E3: 0 to +25 °C)
Driver	ENEC certified

Installation / Mounting

Mounting	Suitable for wall or ceiling mounting Quick and easy installation Suitable for BESA fixing
----------	--

Material / Finish

Body	UV Stabilised white polycarbonate
Diffuser	UV Stabilised opal polycarbonate

Light source information

VARIO (Colour temperature switch)	3000 K, 3500 K & 4000 K
FLEX (Lumen switch)	250mm 800lm(7.5W), 1000lm(9.5W), 1200lm(11.5W) 300mm 1200lm(11W), 1800lm(17W), 2200lm(20.5W)
Efficiency	up to 115lm/W
Lifetime	50 000 hours (@L80, Ta 25 °C)

Controllability (default)

Detection Area	100 % / 50 %
Hold Time	5 s(testing) / 5 min / 15 min / 30 min
Standby level corridor function	10 %
Standby period	0 s / 5 min / 15 min / never off
Daylight Sensor	OFF: MWS only 5 on / 7,5 off lux: external pedestrian walkway 100 on / 150 off lux: Internal Circulation Areas (corridors and stairs), Stockrooms and Storerooms 200 on / 300 off lux: Internal Washrooms, Toilets and Cloakrooms

Mode: Microwave Sensor + Daylight / Photocell only




Ordering guide

Description	SAP Code	
LARA VARIOFLEX 250 1200 830/35/40	96635284	
LARA VARIOFLEX 250 1200 830/35/40 MWS	96635285	
LARA VARIOFLEX 250 1200 BEZEL TRIM WH	96635288	
LARA VARIOFLEX 250 1200 MWS BEZELTRIM WH	96635289	
LARA VARIOFLEX 300 2200 830/35/40	96635286	
LARA VARIOFLEX 300 2200 830/35/40 MWS	96635287	
LARA VARIOFLEX 300 2200 BEZEL TRIM WH	96635290	
LARA VARIOFLEX 300 2200 MWS BEZELTRIM WH	96635291	
Accessories	WH	BLK
LARA VARIOFLEX 250 BEZEL TRIM	96635293	96635294
LARA VARIOFLEX 300 BEZEL TRIM	96635297	96635298
LARA VARIOFLEX 250 EYELID TRIM	96635295	96635296
LARA VARIOFLEX 300 EYELID TRIM	96635299	96635300
LARA E3 KIT SELFTTEST LIFEPO4	96635292	

MWS: microwave presence sensor
WH: white; BLK: black

Sensor range

at 100 % sensitivity

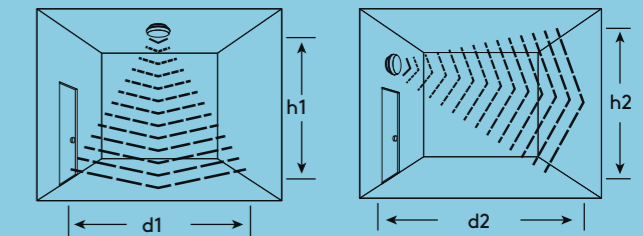

	h1	d1	h2	d2
100 %	3m	10m	2m	6m
50 %	3m	6m	2m	3m