


# Lily

IP44 LED Downlight

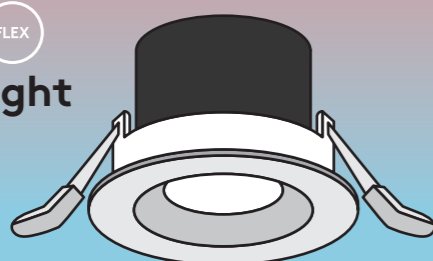


Ideal for: Residential, reception, hotels and restaurants

With many different options, Lily is a versatile solution suitable for various applications.



- **FLEX Feature (Lumen switch):** The flexibility to decide on your lumen package on site makes Lily easy to stock and easy to use
- IP44 downlight with 38° or 60° beam angle
- Optional accessory to boost to IP65 from below
- Suitable for covering directly with insulation materials
- Direct replacement for 35W and 50W halogen downlights
- Product height of only 59 mm: fits various ceiling types
- Suitable for use with phase-cut dimmer switches
- Save time with easy, tool-free installation
- Press fit terminal enables convenient loop in and loop out
- A full assortment of bezel and can accessories make Lily super versatile and easy to convert to pendant or surface mount
- **JUST:** adapt on-site to an emergency version using the Just Emergency PLUG&PLAY kit

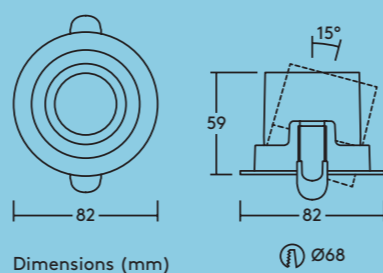

## Specification

Electrical class	II
Ambient operating temperature	-20 to +40°C
IP	IP44 (from below), IP20 (from above); with optional IP65 trim: IP65 (from below), IP20 (from above)

## Installation / Mounting

Mounting	Lily downlight can be installed into a wide range of ceiling types. Mineral wool insulation can be placed directly over the top of the fitting.
----------	---

## Material / Finish

Body	Aluminium heat sink, powder coated
Bezel trim	Aluminium, powder coated
Lens	PC

## Light source information

Colour temperature	3000 K and 4000 K
Lumen	600lm (6W) 850 lm (8.5W)
Efficiency	up to 100lm/W
Lifetime	50 000 hours (@L80, Ta 25°C)
MacAdam (Initial)	3
CRI	≥ 90

## Ordering guide

Complete product – light engine plus round white adjustable trim included	Cat Number
LILY LED SPOT IP44 38° 68 850 930 ADJ WH*	LIL850Z3K38TRIMW
LILY LED SPOT IP44 38° 68 850 940 ADJ WH*	LIL850Z4K38TRIMW
Accessories – Light engines	
LILY LED SPOT IP44 24° 68 850 930 **	LIL850Z3K24
LILY LED SPOT IP44 24° 68 850 940 **	LIL850Z4K24
LILY LED SPOT IP44 38° 68 850 930 **	LIL850Z3K38
LILY LED SPOT IP44 38° 68 850 940 **	LIL850Z4K38
LILY LED SPOT IP44 60° 68 850 930 **	LIL850Z3K60
LILY LED SPOT IP44 60° 68 850 940 **	LIL850Z4K60
Accessories	
Just E3 PLUG&PLAY Kit SelfTest LiFePO4	ECO3TLIFEKIT
Just E3 PLUG&PLAY Kit ManualTest LiFePO4	ECO3MLIFEKIT

Accessories – Trims & Cans	white	black	silver
Bezel trim round adjustable	LILRDTRIMW	LILRDTRIMB	LILRDTRIMS
Bezel trim square adjustable	LILSQTRIMW	LILSQTRIMB	LILSQTRIMS
Bezel trim IP65	LILIP65TRIMW		
Pendant can	LILCANW	LILCANB	

\* Complete product including trim, phase cut dimmable driver and loop in loop out connectors.  
 \*\* Light Engine including phase cut dimmable driver and loop in loop out connectors. Choose either a bezel trim or a pendant can to complete the product of your choice.  
 WH: white; BLK: black; SIL: silver

