


# Poppy

LED Batten

FLEX




Ideal for: Corridors, Workshops, Warehouses & Secondary Rooms

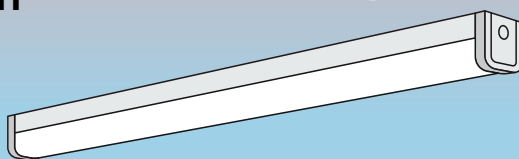

Tactful and timeless, Poppy blends into a wide range of indoor settings.



- FLEX Feature (Lumen Output Switch): The flexibility to decide on your lumen package on site with the flick of a switch
- Easy to install IP40 batten
- Direct replacement for conventional battens in terms of light performance and length
- The innovative design protected endcap provides a unique tool free locking mechanism that guards fitting against unauthorised access
- Locking mechanism easy to open with correct tools for maintenance
- JUST: adapt on-site to an emergency version using the Just Emergency Linear PLUG&PLAY kit (with self test manual test option)
- High visual comfort light emitting surface
- Cable entry from back or side
- Push terminal for loop-in/out wiring
- Wide fitting reducing the possibility of repainting after installation
- BESA compatible

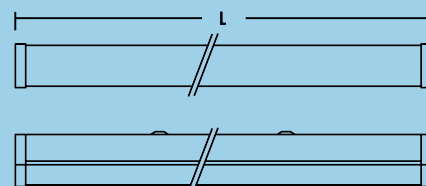

	L	W	H
POPPY FLEX 1200	1204	71	81
POPPY FLEX 1500	1504	71	81
POPPY FLEX 1800	1766	71	81

Dimensions (mm)



### Specification

Electrical class	I
Ambient operating temperature	-20 to +40°C
Driver	ENEC

### Installation / Mounting

Mounting	Surface mount
Installation	Tool free

### Material / Finish

Body	Sheet metal, white finish (RAL 9002)
Diffuser	Polycarbonate, Opal UV stabilized
End caps	Polycarbonate, White (RAL 9002) UV stabilized

### Light source information

Colour temperature	4000 K
Flex Lumen Switch	1200mm: 2600lm (19W), 3800lm (29W), 5000lm (38W) 1500mm: 3500lm (26W), 5000lm (39W), 6500lm (52W) 1800mm: 4400lm (31W), 6500lm (47W), 8500lm (64W)
Efficiency	up to 142 lm/W
Lifetime	50 000 hours (@L80, Ta 25 °C)
MacAdam (Initial)	< 5

### Ordering guide

Description	SAP Code
POPPY FLEX 1200 5000 840	96637592
POPPY FLEX 1500 6500 840	96637593
POPPY FLEX 1800 8500 840	96637594
JUST E3 LINEAR P&P KIT SELFTEST LIFEPO4	96700027