

Jane



IP65 Waterproof Luminaire

With a tough exterior, Jane is the optimal choice for Industrial and commercial applications

- High quality and low energy lighting in wet and dusty environments
- Ideal for replacement and refurbishment projects
- Innovative clipless design with UV stabilized Polycarbonate and frosted diffuser
- 2 sizes available
- Replaceable Wide Voltage Driver 100 V – 240 V
- Robust construction IK08 impact resistance




IP65: Dust tight and water resistant



IK08 rated impact resistance





Wide voltage range from 100 V to 240 V

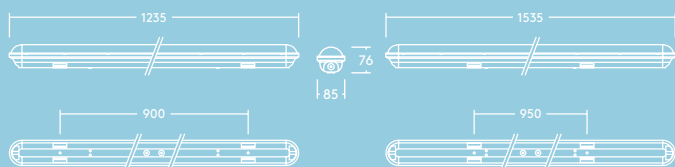

Ordering guide

Description	SAP Code
JANE IP65 Waterproof luminaire, 1.2m, 4800lm, 4000K	22671969
JANE IP65 Waterproof luminaire, 1.5m, 6800lm, 4000K	22671970
SPARE Driver for Jane 1.2m	22671971
SPARE Driver for Jane 1.5m	22671972

Portfolio overview

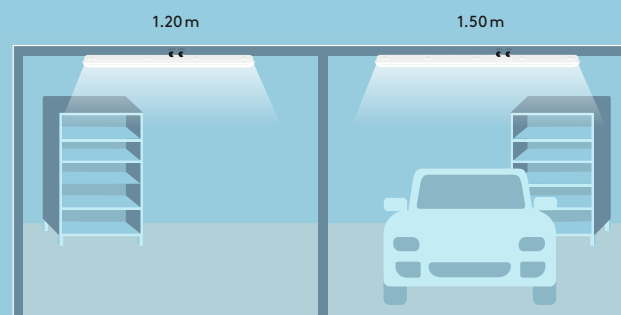

Light source information

- 1.2m: 4800lm (38W)
- 1.5m: 6800lm (55W)
- Efficiency up to 126lm/W
- Lifetime 30000 hours (@L80, Ta 25 °C)
- 4000K
- CRI 80

Specification

- Class I electrical
- IP65
- IK08
- Replaceable Wide Voltage Driver 100 – 240V
- Ambient operating temperature: -20 to +40°C (E3: 0 to +25°C)

Material/Finish

- Body: Polycarbonate (UV stabilised)
- Diffuser: Opal polycarbonate (UV stabilised)
- Bracket: Stainless steel

