


Amy

VARIO

Recessed LED Downlight




Ideal for: Circulation corridors, reception areas, schools/universities and office/meeting rooms

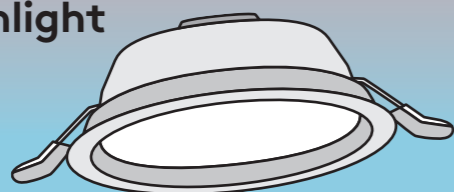

Versatile and timeless, Amy is the ideal solution for a vast range of applications.




- VARIO Feature (Colour Temperature Switch): The ability to choose your colour temperature on site with the flick of a switch
- The fully detachable connector allows for first fix wiring and high voltage circuit testing whilst the luminaire is detached from the connector
- Save time with easy, tool-free installation
- Replacement for traditional 1×18W, 1×26W, 2×18W or 2×26W compact
- Suitable for use with phase-cut dimmer switches
- JUST: adapt on-site to an emergency version using the Just Emergency PLUG&PLAY kit

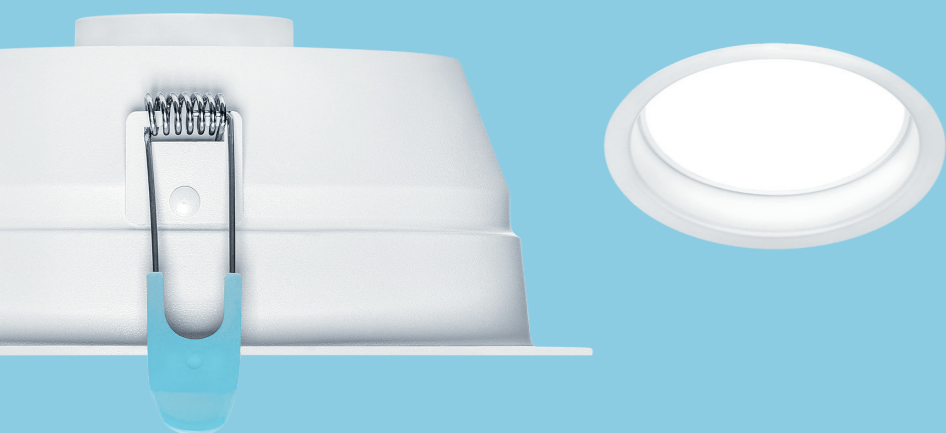

	∅	W1	W2	H1	H2	H3
AMY LED 100	100	120	95	55	18	9
AMY LED 150	150	170	140	69	25	9
AMY LED 200	200-240	250	190	79	30	9

Dimensions (mm)



Specification

Electrical class	II
Ambient operating temperature	-20 to +40 °C

Installation / Mounting

Mounting	Amy can be installed into a wide range of ceiling types of 2–20 mm thickness. Connector for tool-free wiring, also enabling loop-in loop-out
----------	--

Material / Finish

Body	Steel, white finish (RAL 9003)
Diffuser	Polycarbonate

Light source information

VARIO (Colour temperature switch)	3000 K, 3500 K and 4000 K
Lumen	700lm (7W), 1000lm (10W), 1500lm (15W), 2000lm (20W)
Efficiency	up to 100lm/W
Lifetime	50 000 hours (@L80, Ta 25 °C)
MacAdam (Initial)	4

Ordering guide

Description	Cat Number
AMY VARIO 100 LED DL 700 830/35/40	AY700ZVK
AMY VARIO 150 LED DL 1000 830/35/40	AY1000ZVK
AMY VARIO 150 LED DL 1500 830/35/40	AY1500ZVK
AMY VARIO 200 LED DL 2000 830/35/40	AY2000ZVK

Accessories

THORNeco Connector	ECONEC
Just E3 PLUG&PLAY Kit SelfTest LiFePO4	ECO3TLIFEKIT
Just E3 PLUG&PLAY Kit ManualTest LiFePO4	ECO3MLIFEKIT