


Amy Vario

Recessed LED Downlight

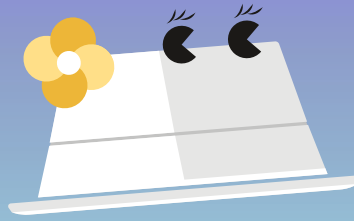

With a pleasing aesthetic, Amy Vario is the ideal solution for a vast range of applications

- Three colour temperatures in one product – simply select 3000K (warm white), 3500K or 4000K (neutral white) to suit the application use
- Consistent light output with no shadowing
- Supplied with flex & plug for quick and easy installation
- Replacement for traditional 1×18 W, 1×26 W, 2×18 W or 2×26 W compact fluorescent downlights
- Suitable for use with phase-cut dimmer switches from approved manufacturers



Ø 120–250 mm



CCT switch
(3000 K, 3500 K
and 4000 K)



700–2000
lumens, up
to 100 lm/W



100, 150 and
200–240 mm
cut-outs



IP44: splash
resistant



Dimmable



Save up to
80% energy
compared
to compact
fluorescent
downlights

Ideal for ...



Corridors






Reception
areas



Offices and
meeting rooms



Schools and
universities

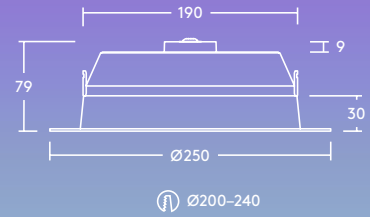


Light distribution

100lm/W



Amy Vario LED 2000lm

cd/klm ULOR: 0 %
DLOR: 100 %
LOR: 100 %



Light source information

- Lifetime 50 000 hours (@L80, Ta 25°C)
- 700lm (7W), 1000lm (10W), 1500lm (15W), 2000lm (20W), up to 100lm/W
- Colour temperature 3000K, 3500K and 4000K in one product
- CRI80
- MacAdam (initial): 4

Installation/Mounting

Amy Vario can be installed into a wide range of ceiling types of 2–20 mm thickness.

Material/Finish

- Body: Steel, white finish (RAL 9003)
- Diffuser: Polycarbonate

Ordering guide

Description	SAP Code
AMY VAR 100 LED DL 700 830/35/40 FP	96651253
AMY VAR 150 LED DL 1000 830/35/40 FP	96651254
AMY VAR 150 LED DL 1500 830/35/40 FP	96651255
AMY VAR 200 LED DL 2000 830/35/40 FP	96651256

Specification

- Class II electrical
- IP44
- IK03
- Ambient operating temperature: -20 to +40 °C
- Insulation Coverable luminaire and driver (IC-F)

