


Barry Vario

LED Batten

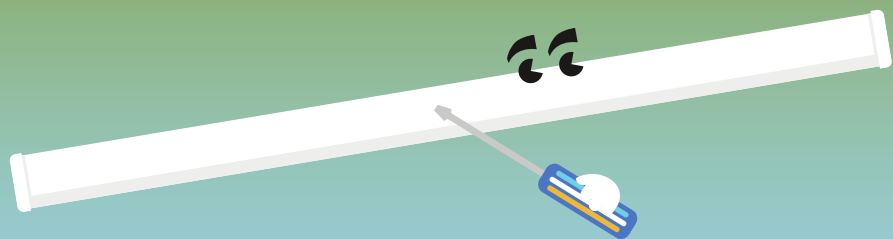

Calm and composed, Barry Vario blends perfectly into a range of indoor settings

- Switchable light colour: choose between warm white (3000 K), cool white (4000 K) or daylight (5700 K) to suit the application
- Direct replacement for conventional battens in terms of light performance and length
- Reliable integrated LED technology, ensuring maintenance-free installation and a long lifetime
- Homogeneous illumination
- High efficacy of 110lm/W
- IPART and VEET approved on selected models



Switchable light colour



2640, 4400 and 6600 lumens, 110lm/W



600 mm (2640 lm), 1200 mm (4400 lm) and 1500 mm (6600 lm)




2h emergency version available



Save up to 60% energy compared with fluorescent battens



50 000 hours lifetime

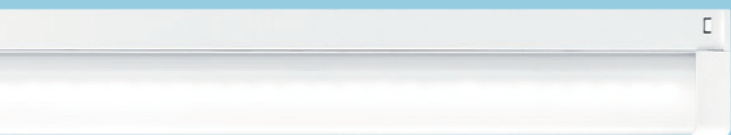

Ideal for ...



Corridors




Workshops



Warehouses



| | L | W | H |
|-----------------------------------|------|----|----|
| BARRY VAR LED 600 2640 830/40/57 | 600 | 66 | 69 |
| BARRY VAR LED 1200 4400 830/40/57 | 1200 | 66 | 69 |
| BARRY VAR LED 1500 6600 830/40/57 | 1500 | 66 | 69 |




Light distribution

110 lm/W



Barry Vario 4400 lm

cd/klm ULOR: 14 %
DLOR: 86 %
LOR: 100 %



Ordering guide

| Description | SAP Code |
|--------------------------------------|----------|
| BARRY VAR LED 600 2640 830/40/57 | 96649382 |
| BARRY VAR LED 1200 4400 830/40/57 | 96649383 |
| BARRY VAR LED 1500 6600 830/40/57 | 96649384 |
| Emergency versions | |
| BARRY VAR LED 600 2640 830/40/57 E2 | 96649385 |
| BARRY VAR LED 1200 4400 830/40/57 E2 | 96649386 |
| BARRY VAR LED 1500 6600 830/40/57 E2 | 96649387 |

Light source information

- 2640 lm (24W), 4400 lm (40W) and 6600 lm (60W), 110 lm/W
- Switchable colour temperature: 3000K, 4000K and 5700K
- 50 000 hours rated life (@L80B50, Ta 25 °C)
- CRI 80
- Beam angle: 120°
- McAdam (initial): 5 step

Specification

- Class I electrical
- IP20
- IK08
- Ambient operating temperature: -20 to +40 °C STD, 0 to +25 °C E2

Installation/Mounting

Surface mounting (screws included)

Material/Finish

- Body: Steel, powder coated, white (RAL 9003)
- Diffuser: PC, IP40, opal white
- End caps: PC, white

