


Henry Vario

Wide body LED batten

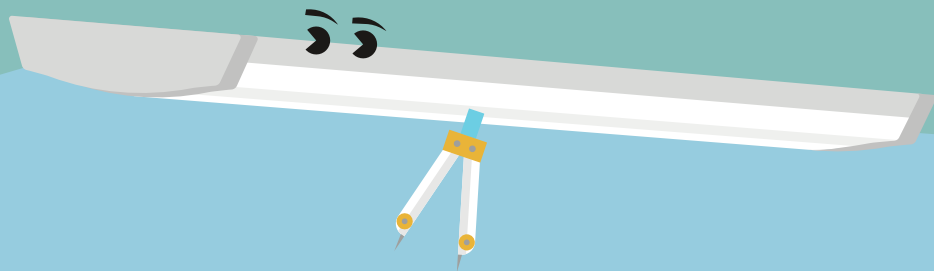

With stylish, curved, wide body design, Henry Vario is the ideal solution for any refurbishment job

- Switchable light colour: choose between cool white (4000 K) or daylight (5700 K) to suit the application
- Direct replacement for conventional wide body battens in terms of light performance and length
- Wide body design is ideal for refurbishment projects, no need for paint touch ups
- High efficacy up to 105 lm/W



Switchable light colour



Lengths of 1180 mm and 1480 mm



2 h emergency versions available



50 000 hours lifetime

Ideal for...



Corridors




Stairwells



Storage facilities



Schools and universities

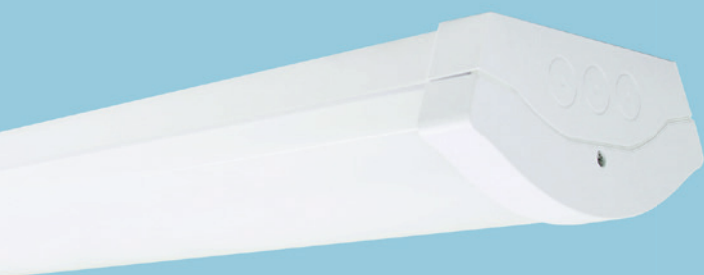




Lighting distribution

105 lm/W



Henry Vario LED 1500lm

cd/klm ULOR: 0 %
DLOR: 100 %
LOR: 100 %

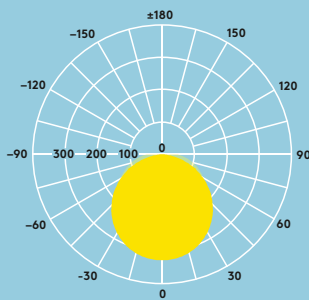

Ordering guide

Description	Wt (kg)	SAP Code
HENRY VAR LED 1200 4000 840/57	2.1	96650023
HENRY VAR LED 1500 6000 840/57	2.5	96650024
HENRY VAR LED 1200 4000 840/57 E2	2.4	96650258
HENRY VAR LED 1500 6000 840/57 E2	2.8	96650259

E2: 2h emergency (AS/NZS 2293) spacing classifications
96650258, C0 - D25, C90 - D20
96650259, C0 - D25, C90 - D16

Light source information

- 4200lm (40W), 6000lm (58W), up to 105lm/W @ 4000K
- Switchable colour temperature: 4000K and 5700K
- Lifetime 50 000 hours (@L70, Ta 25 °C)
- CRI 80
- Beam angle 120°
- McAdam (initial): 5

Specification

- Class I electrical
- IP40
- IK06
- Ambient operating temperature: -20 °C to 40 °C for standard, 0 °C to 30 °C for E2

Installation/Mounting

- Surface mounting (screws included)

Material/Finish

Body: steel, powder coated white (RAL 9016)

Diffuser: PC, reeded opal white

End caps: PC, white

