



Holly

Wall-mounted LED Outdoor Luminaire

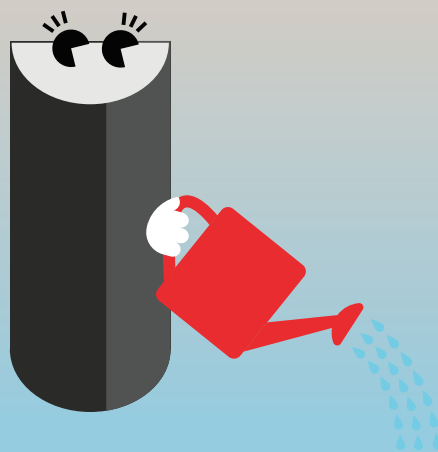

Elegant in appearance,
Holly is the perfect
match for any wall

- Elegant and timeless design
- 3 different designs (round, square, can)
- Versions with up/downlight or only downlight available
- Zero uplight versions available to reduce light pollution
- Special designed back plate provides more mounting flexibility
- Fast and easy installation thanks to a well positioned 3 pole terminal block

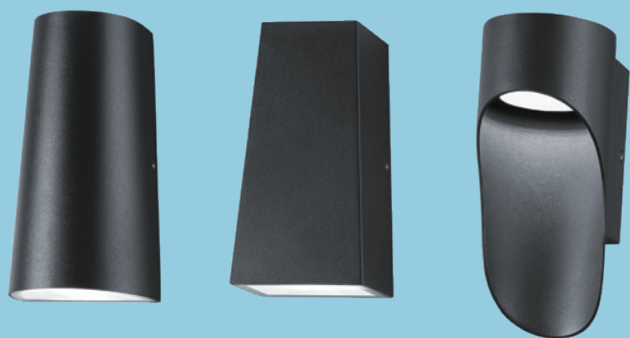

Sealed to IP65
for protected
exterior
applications



50 000 hours
lifetime



IK04 rated
impact
resistance

Ideal for...



Building facades




Residential


Special designed
back plate provides
more flexibility in
mounting



Can version

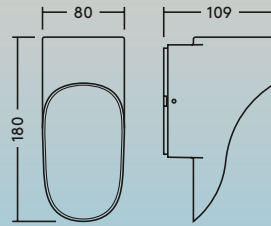

Round and square version




Light distribution

63lm/W



Holly UP/DOWN

cd/klm ULOR: 47 %
DLOR: 53 %
LOR: 100 %

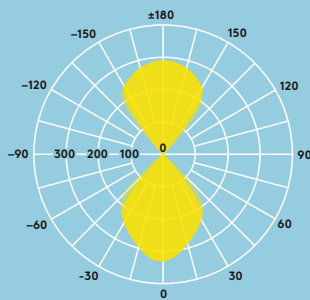


60lm/W



Holly DOWN

cd/klm ULOR: 0 %
DLOR: 100 %
LOR: 100 %

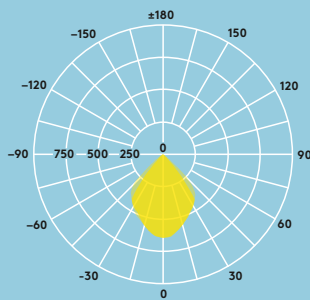

Light source information

- 250 - 500lm
- 3000K
- Lifetime: 50000 hours rated life (@L80, Ta 25°C)
- CRI 80

Specification

- Class I electrical
- IP65
- IK04
- Ambient operating temperature: -20 to +40 °C

Ordering guide

Description	Cat. No.
HOLLY CONE ROUND DOWN IP65 300 830	HOLRD300Z3K
HOLLY CONE ROUND UP/DOWN IP65 500 830	HOLRD500Z3K
HOLLY CONE SQUARE DOWN IP65 300 830	HOLSQ300Z3K
HOLLY CONE SQUARE UP/DOWN IP65 500 830	HOLSQ500Z3K
HOLLY WALL CAN DOWN IP65 250 830	HOLW250Z3K


Installation/Mounting

- Fast and easy installation thanks to a well positioned 3 pole terminal block
- Special designed back plate provides more flexibility in mounting

Material/Finish

- Body: Aluminium die-cast RAL7016
- Front cover: clear glass

Light output

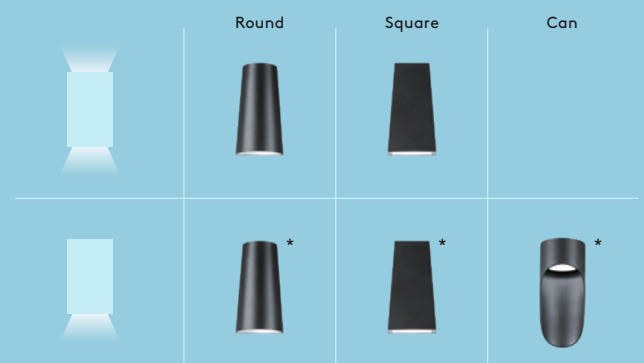

*No light pollution, zero uplight