

Julie Vario

IP65 LED Luminaire



With a tough exterior, Julie Vario is the optimal choice for industrial and commercial applications

- Switchable light colour: choose between warm white (3000 K), cool white (4000 K) or daylight (5700 K) to suit the application
- High quality, low energy lighting in wet and dusty environments
- High quality opal diffuser for uniform lighting
- Ideal for replacement and refurbishment projects, saving up to 60% energy compared to T8 fluorescent
- 2200lm (19W), 4200lm (38W), 6300lm (55W), up to 116lm/W
- Versions with presence sensor and corridor function
- IPART and VEET approved on selected models



Switchable light colour



IP65:
Dust tight and water resistant



IK08 rated impact resistance



Lengths of 632, 1232 and 1532 mm



2h emergency version available



Presence sensor with corridor function

Ideal for ...



Workshops



Car parks



Underpasses




Storage facilities

Specification

- Class I electrical
- IK08
- IP65
- Ambient operating temperature: -20 to +40°C (E2: 0 to +25°C)



	L	W	H
JULIE VAR LED 600 2200 830/40/57	632	103	78
JULIE VAR LED 1200 4200 830/40/57	1232	103	78
JULIE VAR LED 1500 6300 830/40/57	1532	103	78




Light distribution

111lm/W



Julie Vario LED 4200 lm

cd/klm ULOR: 8 %
DLOR: 92 %
LOR: 100 %



Presence sensor with corridor function

Julie's microwave sensor option with corridor function will ensure that you never walk in the dark. The settings are fully adjustable, with the additional benefit of a daylight sensor.

Light source information

- 50000 hours rated life (@L70, Ta 25°C)
- 2200lm (19W), 4200lm (38W), 6300lm (55W), up to 116lm/W
- Colour temperature 3000K, 4000K and 5700K in one product
- CRI80
- MacAdam (initial): 4

Installation/Mounting

Suitable for surface mounting

Material/Finish

- Canopy: Polycarbonate
- Diffuser: Opal polycarbonate (UV stabilised)
- Bracket: Stainless steel


Ordering guide

Description	SAP Code
JULIE VAR LED 600 2200 830/40/57	96649388
JULIE VAR LED 1200 4200 830/40/57	96649389
JULIE VAR LED 1500 6300 830/40/57	96649390
JULIE VAR LED 600 2200 830/40/57 MWSCOR	96649391
JULIE VAR LED 1200 4200 830/40/57 MWSCOR	96649392
JULIE VAR LED 1500 6300 830/40/57 MWSCOR	96649393
Emergency versions	
JULIE VAR LED 600 2200 830/40/57 E2	96649394
JULIE VAR LED 1200 4200 830/40/57 E2	96649395
JULIE VAR LED 1500 6300 830/40/57 E2	96649396
JULIE VARLED600 2200 830/40/57 MWSCOR E2	96649397
JULIE VARLED1200 4200 830/40/57 MWSCOR E2	96649398
JULIE VARLED1500 6300 830/40/57 MWSCOR E2	96649399
Spare parts	
JULIE LED Spare Mount Kit	96628409

MWS: microwave presence sensor COR: corridor function

Sensor range

at 100 % sensitivity

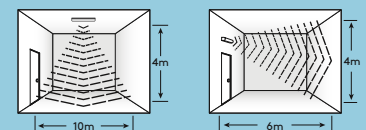

Controllability

Sensitivity	50%, 100 %
Time	5s, 30s, 1min, 10min
lux	2lux, 10lux, 50lux, disable
Stand-by time	0sec, 30sec, 20min, endless
Dimming Level	10%, 20%, 30%, 50%

