

Leonie

VARIO FLEX

LED Floodlight




Ideal for: Building Facades, car parks, footpaths and gardens



Small yet extremely powerful, Leonie lights up dark outdoor areas.




- VARIO Feature (Colour Temperature Switch): The ability to choose your colour temperature on site with the flick of a switch
- FLEX Feature (Lumen Output Switch): The flexibility to decide on your lumen package on site with the flick of a switch
- Compatible with THORNeco cable system
- Very light-weight, compact and streamline design
- Tilted universal mounting bracket allows easy surface mounting
- Converts easily to sensor version using LEONIE PLUG&PLAY sensor accessory

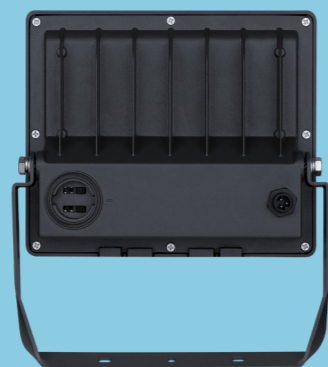

	L	W	H1	H2
LEONIE IP65 16W	164	48	199	134
LEONIE IP65 40W	177	56	214	148

Dimensions (mm)



Specification

Electrical class	I
Ambient operating temperature	-30 to +40 °C

Installation / Mounting

Mounting	Suitable for wall or ceiling mounting Pre-wired with a 55cm long mains cable and open cable ends Ground spike and wall bracket available as accessories
----------	---

Material / Finish

Body	Aluminium, powder coated, RAL 7016 (anthracite grey)
Bracket	Carbon steel, RAL 7016 (anthracite grey)
Front cover	glass

Light source information

VARIO (Colour temperature switch)	3000 K, 3500 K & 4000 K
FLEX (Lumen switch)	16 W: 1000lm; 1500lm; 2000lm 40 W: 3300lm; 4000lm; 5000lm
Efficiency	up to 143lm/W
Lifetime	50 000 hours (@L80, Ta 25 °C)
MacAdam (Initial)	5

Controllability (default)

Sensitivity	10%, 50%, 75%, 100%
Time	5s, 90s, 5min, 15min
lux	2lux, 10lux, 50lux, disable

Presence sensor

The optional sensor will ensure that light is only delivered when needed. The motion detection range and time duration is fully adjustable, with the additional benefit of a day-light sensor for illuminance levels between 2 and 50lux.



Ordering guide

Description	Cat Number
LEONIE VARIOFLEX IP65 16W 830/35/40	LEO16WVF
LEONIE VARIOFLEX IP65 40W 830/35/40	LEO40WVF
Accessories	
LEONIE VARIOFLEX PLUG&PLAY MWS	LEOMWSVF
LEONIE VARIOFLEX WALL BRACKET	LEOBRKVF
LEONIE VARIOFLEX SPIKE	LEOSPKVF
Compatible THORNeco cable system	
MAINS ADAPTOR	ECOMAINSAD
EXTERNAL INTEGRATOR	ECOEXTINT
EXTENSION CABLE - 1m	ECOEXTC1M
EXTENSION CABLE - 2m	ECOEXTC2M
EXTENSION CABLE - 5m	ECOEXTC5M
EXTENSION CABLE - 10m	ECOEXTC10M
CONNYP IP68 CONNECTOR	CONIPCON
T-CONNECTOR	ECOTCON
MULTICONNECTOR	ECOMULTICON

MWS: microwave presence sensor

MWS Sensor range

at 100% sensitivity

