

Mary

LED Garden Floodlight
with Earth Spike




Ideal for:
Building facades and gardens

Highlight your surroundings with Mary,
our flexible garden floodlight.



- Reflector for a sharp, defined light beam
- Supplied with a heavy duty rubber connection cable with integrated waterstop
- Compatible with THORNeco cable system

- Adaptor with open leads included
- High corrosion resistance (C4) and water ingress protection
- Compatible with all the PLUG&PLAY outdoor sensor accessories (sensor, daylight, photocell)

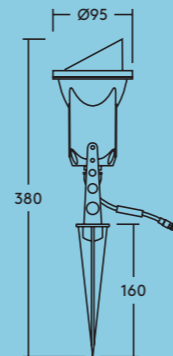

Specification

Electrical class	I
Ambient operating temperature	-20 to +50 °C

Installation / Mounting

Mounting	Earth spike included Pre-wired with mains cable and adapter with open leads (1.5mm ²) H07RN-F connection cable Salt resistant according to corrosion class C4
----------	--

Material / Finish

Body	Aluminium die-cast (RAL 9005)
Screws	Stainless steel AISI 316 with GEOMET® 500 coating
Front cover	Clear glass

Light source information

Colour temperature	3000 K
Lumen	500lm (8W)
Efficiency	up to 62lm/W
Lifetime	50 000 hours (@L80, Ta 25 °C)
CRI	80

Ordering guide

Description	Cat Number
MARY GARDEN SPOT IP66 500 830	MAR500Z3K
Accessories	
ECO PIR SENSOR	ECOPIR
ECO PC SENSOR	ECOPCELL

Compatible THORNeco cable system

