


# Sharon Vario


## LED Downlight

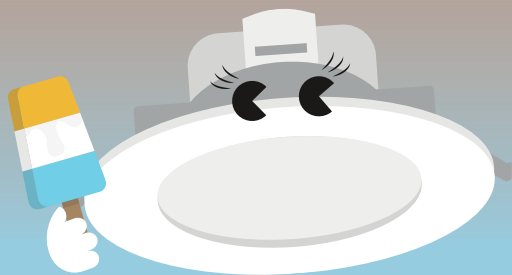

Reliable and adaptable, Sharon Vario is perfectly suited to everyday needs

- A compact recessed LED downlight with switchable light colour: choose between warm white (3000 K), cool white (4000 K) and daylight (5700 K) to suit application use
- Beam angle 95°
- High colour rendering and uniform light surface with no shadowing
- Integrated electronic dimmable LED driver suitable with trailing edge and universal dimmers\*
- Two sizes available: 8 W with 90–95 mm cut-out and 16 W with 160–170 mm cut-out
- IPART and VEET approved

\*see installation instructions for compatible dimmer list

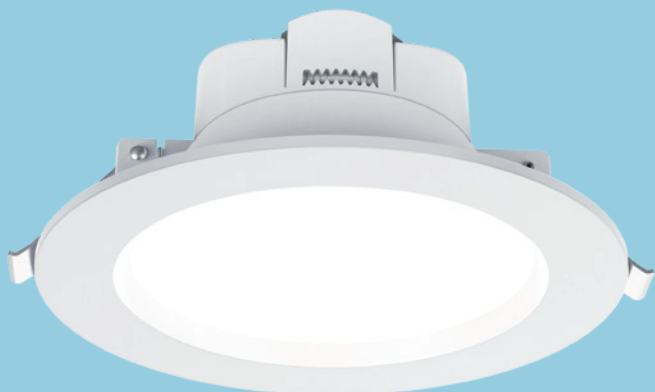

Switchable light colour



700–1691 lumens, up to 105 lm/W



IP54 (from below)  
IP40 (from above)



40 000 hours lifetime



Dimmable



Replacement for 1×18 W CFL and 2×18 W CLF

Ideal for ...






Corridors



Toilets & Bathrooms



Residential




## Light distribution

100lm/W



### Sharon Vario 800lm 4000K

cd/klm ULOR: 0 %  
DLOR: 100 %  
LOR: 100 %

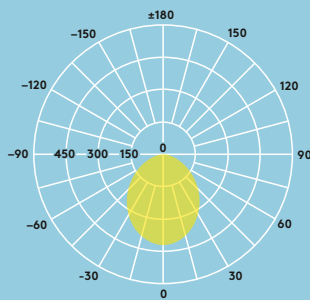


100lm/W



### Sharon Vario 1600lm 4000K

cd/klm ULOR: 0 %  
DLOR: 100 %  
LOR: 100 %

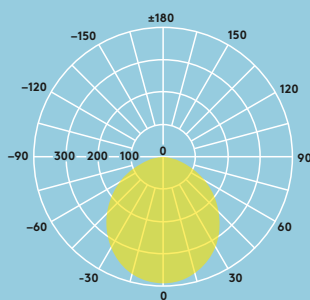

## Ordering guide

Description	SAP Code
SHARON VAR LED 90 800 830/40/57 DIM FP	96649647
SHARON VAR LED 160 1600 830/40/57 DIM FP	96649648

### Light source information

- 40000 hours rated life (@L70, Ta 25°C)
- 3000K: 700lm (8W) and 1485lm (16W)
- 4000K: 800lm (8W) and 1691lm (16W)
- 5700K: 735lm (8W) and 1530lm (16W)
- CRI 80

### Specification

- ClassII electrical
- IP54 (from below), IP40 (from above)
- IK02
- Insulation Coverable Luminaire (IC-4)

### Installation/Mounting

Sharon Vario LED can be installed into a wide range of ceiling types of 2-20 mm thickness

### Material/Finish

Body and trim: Polymer, white

