


# Tom

VARIO

## Circular IP66 LED Bulkhead


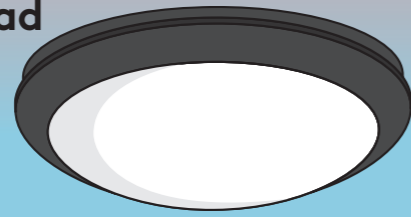


Ideal for: Circulation corridors, public entrance areas, stairwells, sanitary rooms and underpasses

Tom is strong, bright and smart.  
Suitable for both indoor and outdoor areas.



- VARIO Feature (Colour Temperature Switch): The ability to choose your colour temperature on site with the flick of a switch
- Frosted diffuser ensures a homogeneous light effect and visual comfort
- Direct replacement for 2x26W or 2x18W CFL
- Available in 2 different lumen packages, 1200lm and 2000lm
- Maximise energy savings using microwave sensor version

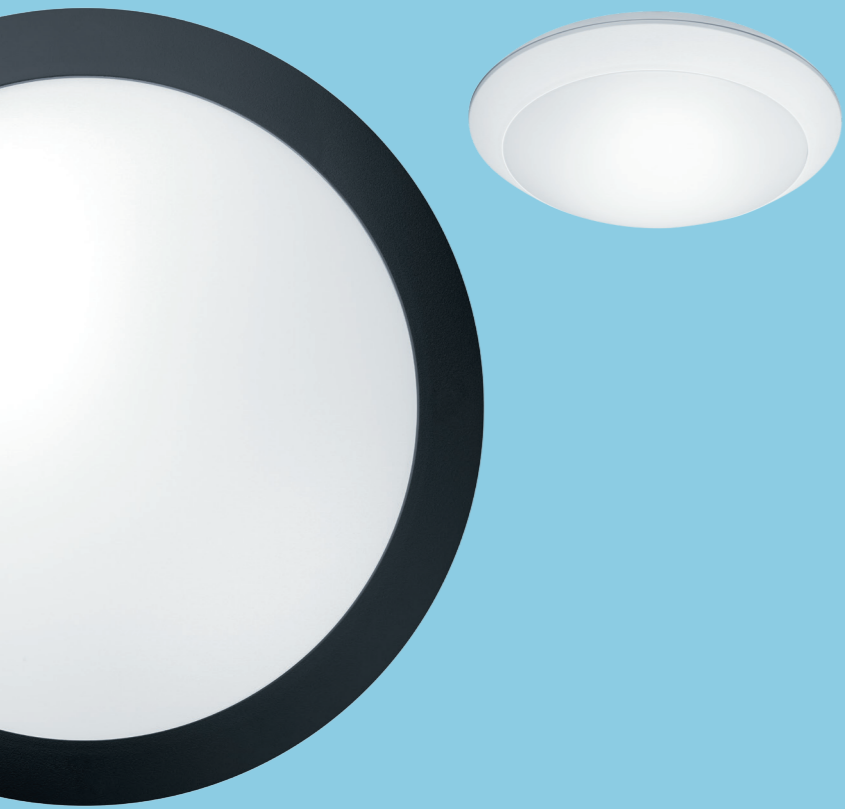

### Specification

Electrical class	II
Ambient operating temperature	-20 to +40 °C

### Installation / Mounting

Mounting	Suitable for wall or ceiling mounting Quick and easy installation thanks to a piano key terminal for wires up to 2.5 mm <sup>2</sup>
----------	---

### Material / Finish

Body	UV stabilised polycarbonate: White (RAL 9010), Black (RAL 9005)
Diffuser	UV stabilised opal polycarbonate

### Light source information


VARIO (Colour temperature switch)	3000 K and 4000 K
Lumen	1200 lm (14 W), 2000 lm (20 W)
Efficiency	up to 100 lm/W
Lifetime	50 000 hours (@L70, Ta 25 °C)
MacAdam (Initial)	6

### Controllability (default)

Sensitivity	20 %, 50 %, 75 %, 100 %
Time	10 s, 1 min, 5 min, 10 min, 15 min, 20 min, 25 min, 30 min
lux	10 lux, 20 lux, 50 lux, 100 lux, 200 lux, 300 lux, 500 lux, disable

### Sensor range

at 100 % sensitivity

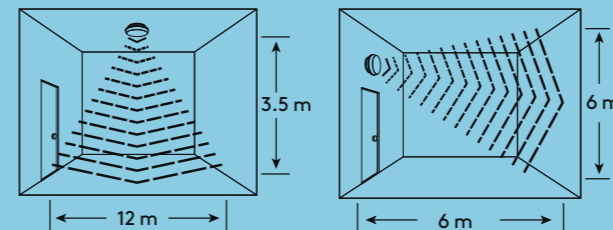

### Ordering guide

Description	WH	BLK
TOM VARIO LED 300 2000 830/40	TM2000ZWVK	TM2000ZBVK
TOM VARIO LED 300 2000 830/40 MWS	TM2000ZMWVK	TM2000ZMBVK
TOM VARIO LED 300 1200 830/40	TM1200ZWVK	TM1200ZBVK
TOM VARIO LED 300 1200 830/40 MWS	TM1200ZMWVK	TM1200ZMBVK

MWS: microwave sensor  
WH: white, BLK: black