

Mia Vario



Corridors



Reception areas



Offices and meeting rooms



Schools and universities

Recessed LED Downlight



With a pleasing aesthetic, Mia Vario is the ideal solution for a vast range of applications

- **VARIO Feature:** Three colour temperatures in one product – 3000K, 4000K or 5700K
- Covers up to 240 mm holes for refurbishment
- Quick and easy installation via external tool free loop in loop out connector
- Suitable to use with the Just Emergency PLUG&PLAY E3 KIT for 3 hours emergency operation (separately available)




CCT switch (3000K, 4000K and 5700K)




IP44 (from below): Splash resistant for hassle-free cleaning




Wide voltage range from 110V to 240V

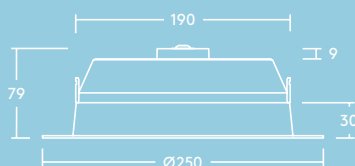

⌀200-240



⌀150





⌀100

Ordering guide

Description	SAP Code
MIA VARIO Downlight Ø100mm, 700lm, CCTs 830, 840 and 857	22671975
MIA VARIO Downlight Ø150mm, 1500lm, CCTs 830, 840 and 857	22671976
MIA VARIO Downlight Ø200mm, 2000lm, CCTs 830, 840 and 857	22671977
Accessories	
Spare Driver MIA 100	22671978
Spare Driver MIA 150	22671979
Spare Driver MIA 200	22671980
3h Emergency PLUG&PLAY 230V	22672006

Portfolio overview

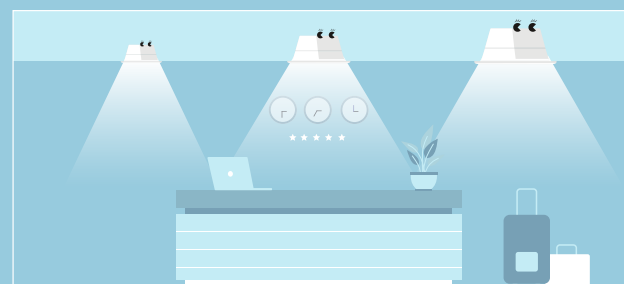

Light source information

- Lifetime 30000 hours (@L80, Ta 25°C)
- 700lm (7W), 1500lm (15W), 2000lm (20W), up to 100lm/W
- Colour temperature 3000K, 4000K and 5700K in one product
- CRI80
- MacAdam (initial): 4 step

Specification

- Class II electrical
- IP44 (from below), IP20 (from above)
- IK03
- Ambient operating temperature: -20 to +40°C
- Wide Voltage: 110V - 240V

Material/Finish

- Body: Steel, white finish (RAL 9003)
- Diffuser: Polycarbonate

