

Tara Vario Flex



Circulation corridors



Stairwells



Underpasses



Public entrance areas

Circular IP65 Bulkhead



Bezel trim BLK



Bezel trim WH



Sporting many different looks, Tara Vario Flex is the ultimate choice for a range of indoor and outdoor settings

- **FLEX Feature:** Decide on your Lumen package directly on site for two sizes (250 mm and 300 mm)
- **VARIO Feature:** Three colour temperatures in one product – 3000K, 4000K or 5700K
- Sealed to IP65 for protected exterior applications
- Robust construction IK10 impact resistance
- Optional: Emergency PLUG&PLAY E3 KIT for 3 hours emergency operation (as accessory)*



CCT & Lumen switch




IP65: Dust tight and water resistant



IK10 rated impact resistance

Material/Finish

- Body: Polycarbonate
- Diffuser: Polycarbonate





	Ø
TARA VARIO FLEX LED 250	250
TARA VARIO FLEX LED 300	300

Ordering guide

Description	SAP Code
TARA VARIO FLEX Bulkhead Ø 250 mm, Lumensteps 600lm, 900lm & 1200lm, CCTs 830, 840 & 857	22671981
TARA VARIO FLEX Bulkhead Ø 300 mm, Lumensteps 700lm, 1200lm & 1600lm, CCTs 830, 840 & 857	22671982
Accessories	
TARA Bezel Trim White, Ø 250 mm	22672007
TARA Bezel Trim Black, Ø 250 mm	22672008
TARA Bezel Trim White, Ø 300 mm	22672009
TARA Bezel Trim Black, Ø 300 mm	22672010
Spare Engine Tara Vario Flex 250	22671983
Spare Engine Tara Vario Flex 300	22671984
3h Emergency PLUG&PLAY*	96635292

*230V

Portfolio overview

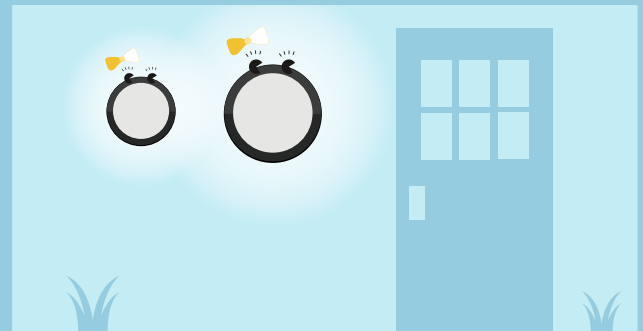

Light source information

- Flex:

250mm	600lm	900lm	1200lm
300mm	700lm	1200lm	1600lm
- Vario: 3000K, 4000K & 5700K
- Efficiency up to 100lm/W
- Lifetime 30000 hours (@L80, Ta 25°C)
- CRI80

Specification

- Class II electrical
- IP65
- IK10
- Ambient operating temperature: -20 to +40°C (E3: 0 to +25°C)
- 230V

www.thorneco.com