


Zoe

VARIO

Slim LED Downlight

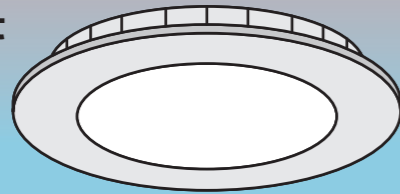


Ideal for: Circulation corridors, reception areas, schools/universities and office/meeting rooms

Slim and adaptable, Zoe is ideal for your everyday needs.




- VARIO Feature (Colour Temperature Switch): The ability to choose your colour temperature on site with the flick of a switch
- With a slimline profile of 26mm Zoe fits most ceiling types
- Save time with easy, quick and tool-free installation
- Curved low profile driver makes installing Zoe easy, even in the tightest of ceiling spaces
- JUST: adapt on-site to an emergency version using the Just Emergency PLUG&PLAY kit



	Ø1	Ø2	W	H1	H2
ZOE LED DL 130	145	130	145	20	26
ZOE LED DL 170	180	170	180	20	26
ZOE LED DL 210	220	210	220	20	26

Dimensions (mm)

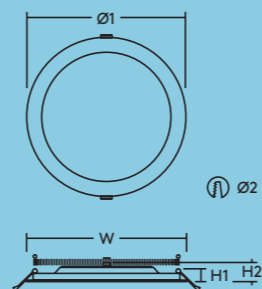

Specification

Electrical class	II
Ambient operating temperature	-10 to +40 °C (E3: 0 to +25 °C)
IP	IP44 (from below), IP20 (from above)
Driver	ENEC certified

Installation / Mounting

Mounting	Recessed installation into a wide range of ceiling types Connector for tool-free wiring, also enabling loop-in loop-out Surface mounting option for Zoe 210
----------	---

Material / Finish

Body	Aluminium, white finish
Diffuser	PS

Light source information

VARIO (Colour temperature switch)	3000 K, 3500 K & 4000 K
Lumen	700lm (9W), 1000lm (12W), 1600lm (18W) and 2000lm (22W)
Efficiency	up to 90lm/W
Lifetime	50000 hours (@L80, Ta 25 °C)
MacAdam (Initial)	4

Ordering guide

Description	Cat Number
ZOE VARIO LED DL 130 700 830/35/40	ZO700ZVK
ZOE VARIO LED DL 170 1000 830/35/40	ZO1000ZVK
ZOE VARIO LED DL 210 1600 830/35/40	ZO1600ZVK
ZOE VARIO LED DL 210 2000 830/35/40	ZO2000ZVK
DALI	
ZOE VARIO LED DL 210 2000 830/35/40 HFIX	ZO2000XVK
Accessories	
Just E3 PLUG&PLAY Kit SelfTest LiFePO4	ECOE3TLIFEKIT
Just E3 PLUG&PLAY Kit ManualTest LiFePO4	ECOE3MLIFEKIT
ZOE VARIO 210 SURFACE MOUNT BOX	ZOSURBOX