


# Roxy

FLEX

## LED Surface-mounted and Pendant Luminaire

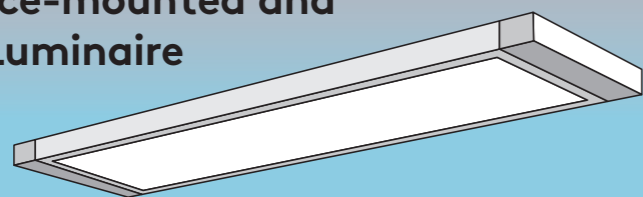

Versatile and comfortable, Roxy provides the right light for desk-based working.




- **FLEX Feature (Lumen Output Switch):** The flexibility to decide on your lumen package on site with the flick of a switch
- With UGR <19 Roxy provides comfortable glare-free lighting ideal for learning and desk based environments
- Available in direct, direct/indirect and asymmetric, Roxy has the right mix

- of distributions to meet all of your requirements
- Save time with this lightweight, easy to install luminaire
- Exchangeable endcaps converts Roxy easily to emergency, presence and daylight sensor and enables continuous row

### End Cap Accessories



Continuous Row



Emergency



Sensor

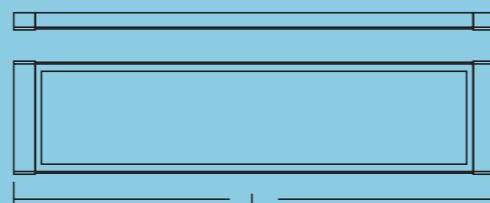

	L	W	H
ROXY 1200	1200	306	47
ROXY 1500	1500	306	47

Dimensions (mm)



Ideal for: Schools/universities and office/meeting rooms

### Specification

Electrical class	I
Ambient operating temperature	-20 to +40 °C (E3: 0 to +40 °C)

### Installation / Mounting

Mounting	Suitable for ceiling mounting, (drilling template directly on packaging) Suitable for suspension (optional kit for direct and asymmetric luminaire) Wall brackets for wall mounting available
----------	---

### Material / Finish

Direct	
Body	Extruded aluminium
Diffuser	PS, UGR Sheet: PET
Direct/Indirect	
Body	Extruded Aluminium
Diffuser	PS, UGR Sheet: PET
Lens	PC
Asymmetric	
Body	Sheet steel
Lens	PC

### Light source information

Colour temperature	4000 K
Lumen packages	2000lm (16W)(ASYM) 4000lm (32W)(Direct) 5500lm (45W)(Direct and Direct/Indirect)
Efficiency	>127 lm/W
Lifetime	50 000 hours rated life (@L80, Ta 25 °C)
MacAdam (Initial)	4
UGR	<19

### Controllability (default)

Sensitivity	50 %, 100 %
Time	5 sec (test mode), 5 min, 15 min, 30 min
Lux	100 lux, 200 lux, 300 lux, 400 lux, 500 lux, OFF

### Ordering guide

Description	SAP Code
ROXY 1200 D 4000 840 FLEX	96634867
ROXY 1500 D 5500 840 FLEX	96634869
ROXY 1200 D/I 5500 840 FLEX	96634871
ROXY 1200 ASYM 2000 840	96634873
DALI	
ROXY 1200 D 4000 840 HFIX	96634868
ROXY 1500 D 5500 840 HFIX	96634870
ROXY 1200 D/I 5500 840 HFIX	96634872
ROXY 1200 ASYM 2000 840 HFIX	96634874
Accessories	
ROXY PIR PLUG&PLAY	96634876
ROXY E3 PLUG&PLAY	96634877
ROXY Connector	96634879
ROXY Suspension Kit	96634878
ROXY Wall Brackets	96634875

### Sensor range

at 100 % sensitivity

